
# **Magnetics**

# **Power Inductor**

## **MODEL HA55**

- Operating Temperature Range -40°C to +155°C
- High inductance, high efficiency and excellent current handling
- Use as DC-DC converter and in high current applications, suitable for industrial as well as automotive application
- **RoHS Compliant**
- AEC-Q200 Certified




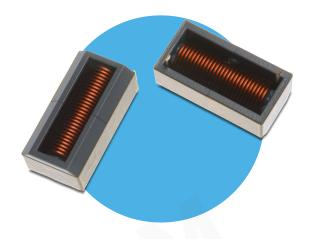



All parts are Pb-free and comply with EU Directive 2011/65/EU (RoHS2)

## **Electrical Schematic**

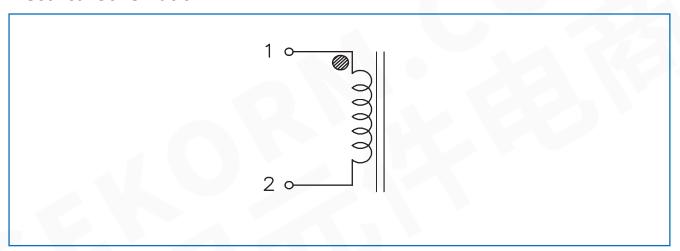

# Specifications @ 25°C

Part Number	Inductance 100kHz, 100mV (µH) TYP	@Rated Current Inductance 100kHz, 100mV (μΗ) TYP	I <sub>rated</sub> Rated Current (A)	I <sub>sat</sub> Saturation Current (A)	DC Resistance		SRF	
					mΩ Typ	mΩ Max	MHz Type	Figure
HA55-3623200LF	20.00	14.50	33.00	35.0	3.35	3.85	14.0	1
HA55-3023115LF	11.50	8.24	39.00	43.0	2.30	2.76	33.0	2
HA55-2223070LF	7.00	5.33	40.00	48.0	1.70	2.00	33.0	3
HA55-3023130LF	13.00	9.33	37.00	40.0	2.50	3.25	19.0	4
HA55L-3623220LF*	22.00	13.00	34.00	26.0	3.35	3.85	12.0	1
HA55L-3023135LF*	13.50	8.42	39.00	30.0	2.30	2.76	33.0	2
HA55L-2223088LF*	8.83	5.52	41.00	33.0	1.70	2.00	36.0	3
HA55L-3023163LF*	16.30	9.38	37.00	27.0	2.50	3.25	25.0	4
HA55L-3623400LF*	40.00	24.00	26.00	20.0	5.70	6.20	8.25	1
HA55L-4523500LF*	50.00	26.00	32.00	20.0	7.25	8.35	6.85	5

Notes: (1) Inductance is measured at 100kHz, 0.1Vrms, 0Adc.
(2) The rated current is the approximate DC current at which ΔT is approximately 60°C. This current is determined by soldering


the unit on a typical application PCB, and then applying the current to the unit for 30 minutes.

(3) Isat is the saturation current at which inductance rolls off approximately 30% from its initial unbias inductance value.

<sup>\*</sup> Low cost version



## **Electrical Characteristics**

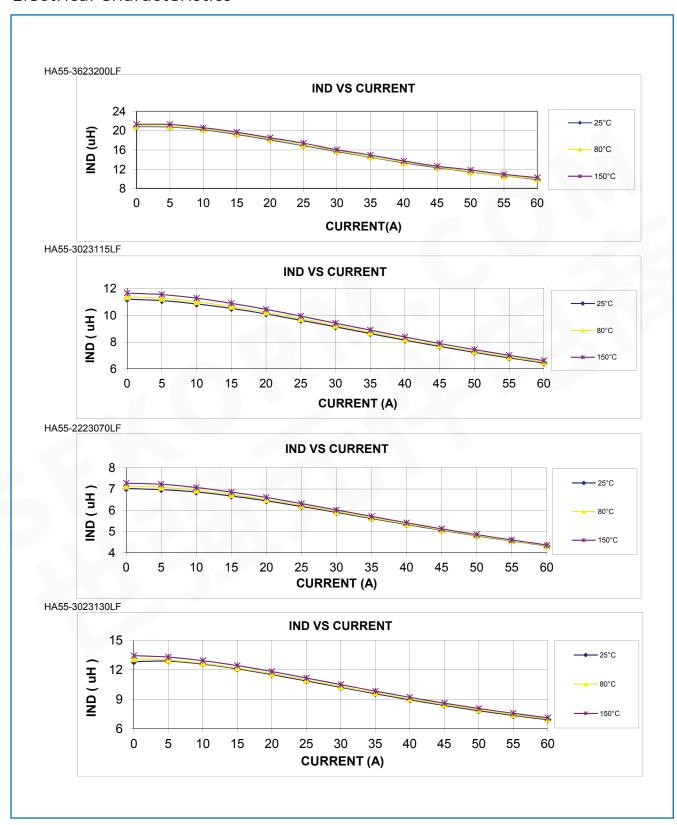


We reserve the right to change specifications without prior notice.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.




## **Electrical Characteristics**

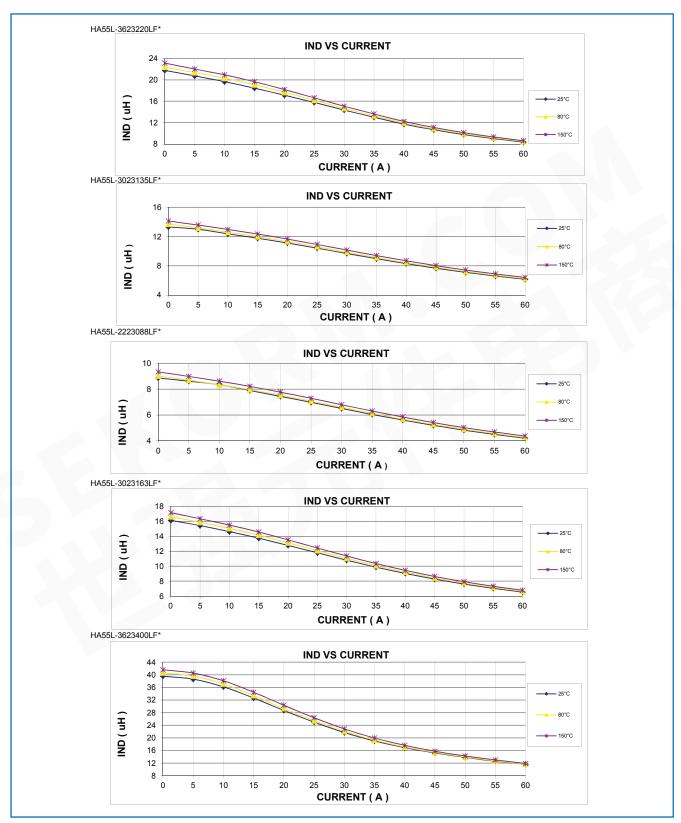

## General Note




# **Electrical Characteristics**

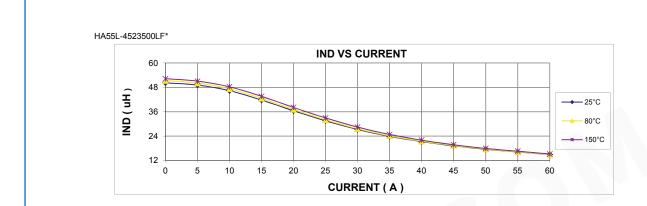

### General Note



## **Electrical Characteristics**

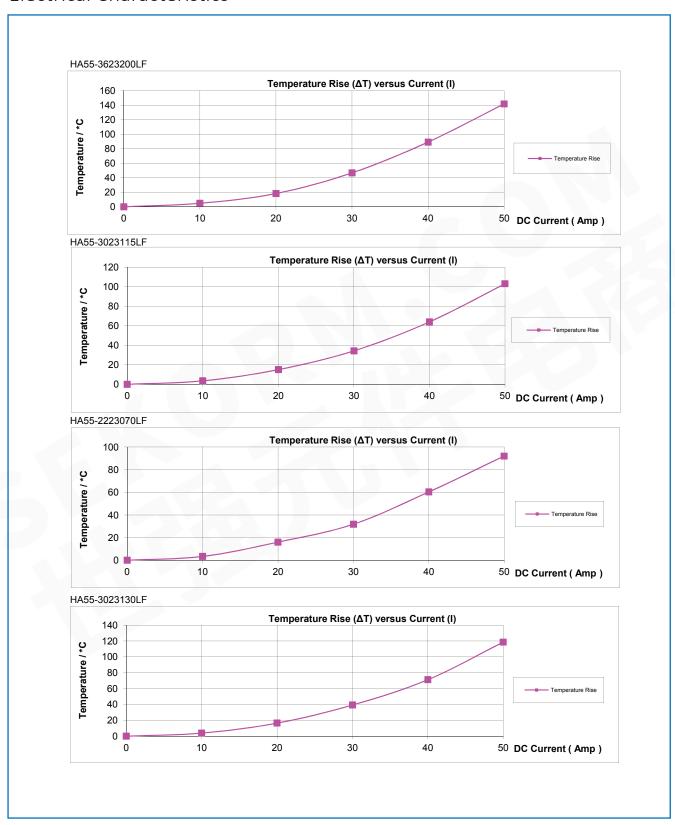

We reserve the right to change specifications without prior notice.


### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.



## **Electrical Characteristics**

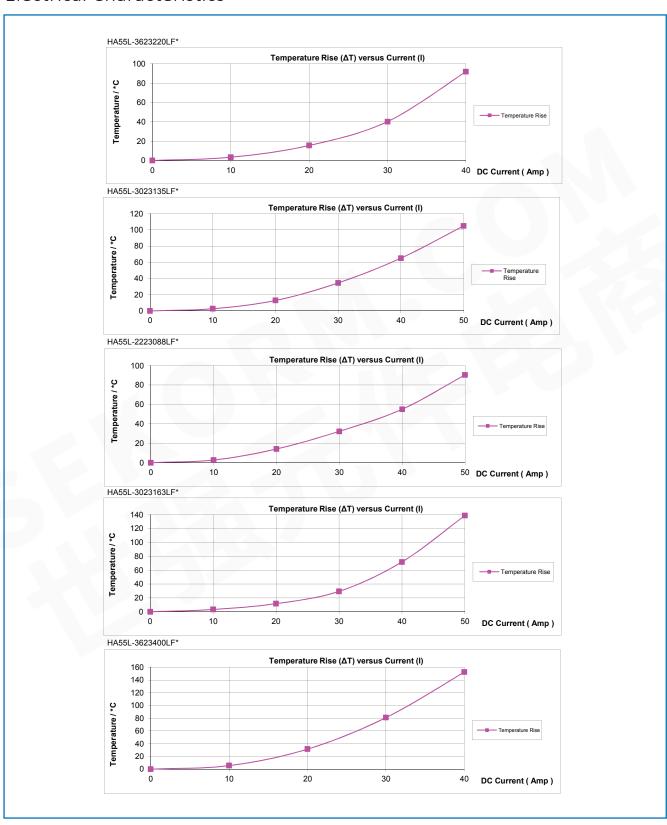


We reserve the right to change specifications without prior notice.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.



# **Electrical Characteristics**

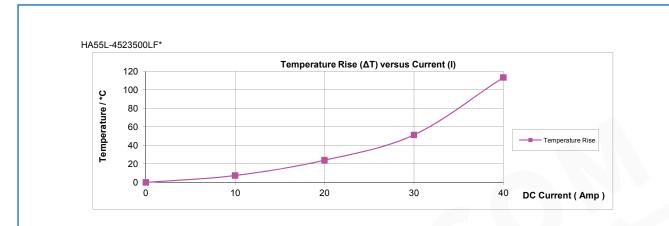

We reserve the right to change specifications without prior notice.


### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# **Electronics**

## **MODEL HA55**

# Mechanical Outline (mm)

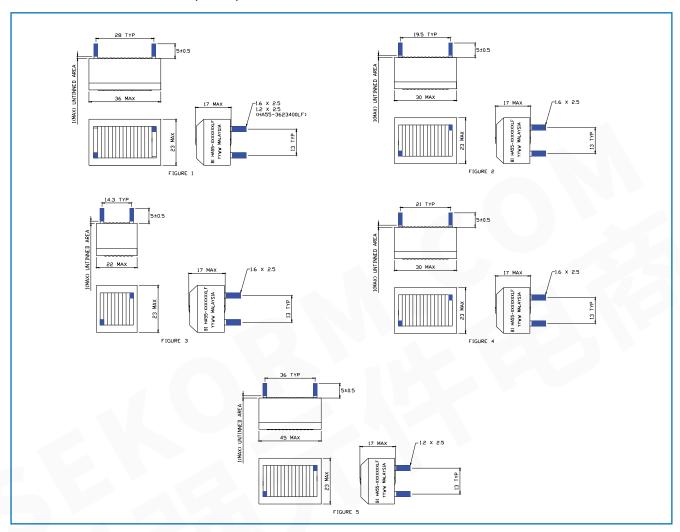


# Packaging

(Packed in compact PE foam)

- 1) 1 shipping carton 72pcs (FOR CASE 3623 & 4523)
- 2) 1 shipping carton 108pcs (FOR CASE 3023)
- 3) 1 shipping carton 144pcs (FOR CASE 2223)

# Ordering Information

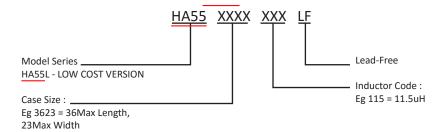

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.