



● 尺寸图/DIMENSION (单位/UNIT : mm)

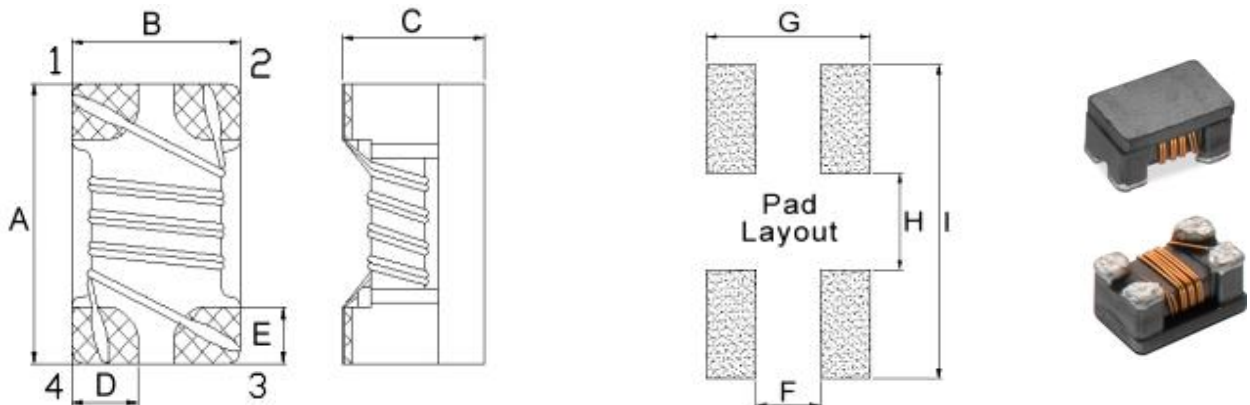

\$ " % " & 0 D [ ' : 7 S ( : 7 S  
 ) : 7 S \* : 7 S + : 7 S , : 7 S

● 电路图/SCHEMATIC



● 注意事项/NOTE :



- 1.产品不印字
- 2.崩缺面积直径小于0.4mm为允收



● 电气特性/ELECTRICAL CHARACTERISTIC

Part Number	Common mode Impedance ( $\Omega$ @10MHz)	Inductance (uH) @100KHz/0.1V	DC Resistance ( $\Omega$ ) Max.	Rated Current (mA)Max.	Rated Volt. (Vdc)Max	IR ( $\Omega$ ) min.
GCM-3225DF-110	300 Min	11 +50%/-30%	0.4	300	80	10M
	550 Typ					
GCM-3225DF-220	500 Min	22 +50%/-30%	0.5	250	80	10M
	1100 Typ					
GCM-3225DF-510	1000 Min	51 +50%/-30%	0.7	200	80	10M
	2600 Typ					
GCM-3225DF-101	2200 Min	100 +50%/-30%	1.5	150	80	10M
	5100 Typ					

- (1).Rated Current: Temp.rise 40°C Typ
- (2).Operating Temperature: -40°C up to +125°C
- (3).Storage Temperature: -20°C up to +40°C, 75% RH max.

● 特征曲线/CHARACTERISTICS(REFERENCE)

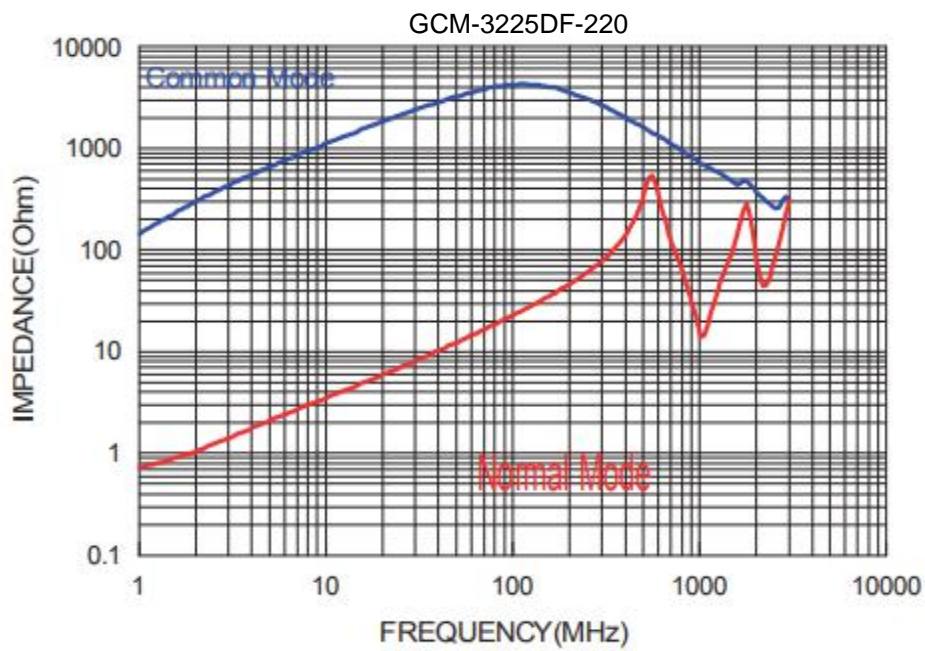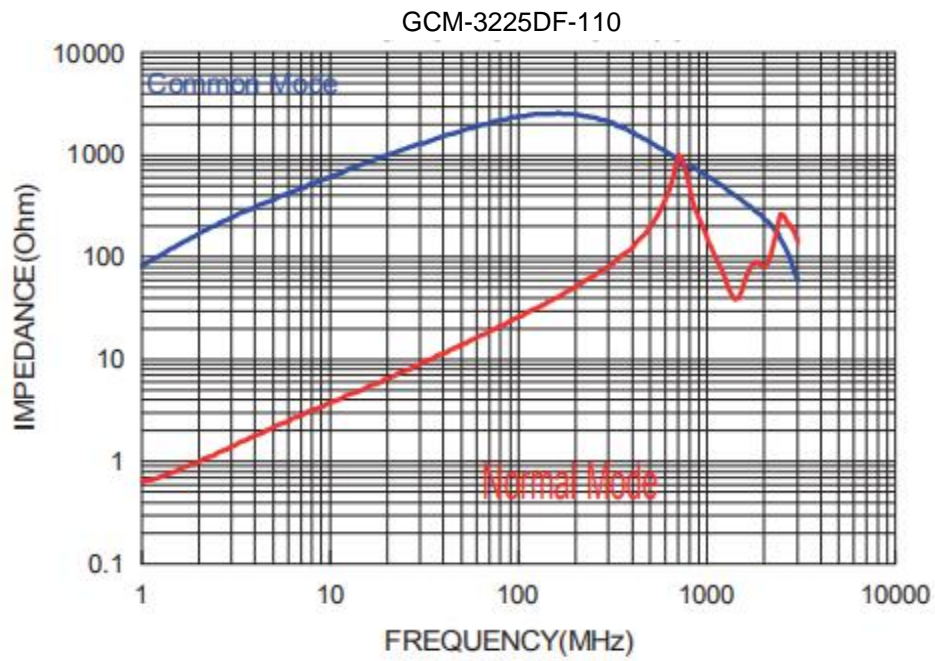


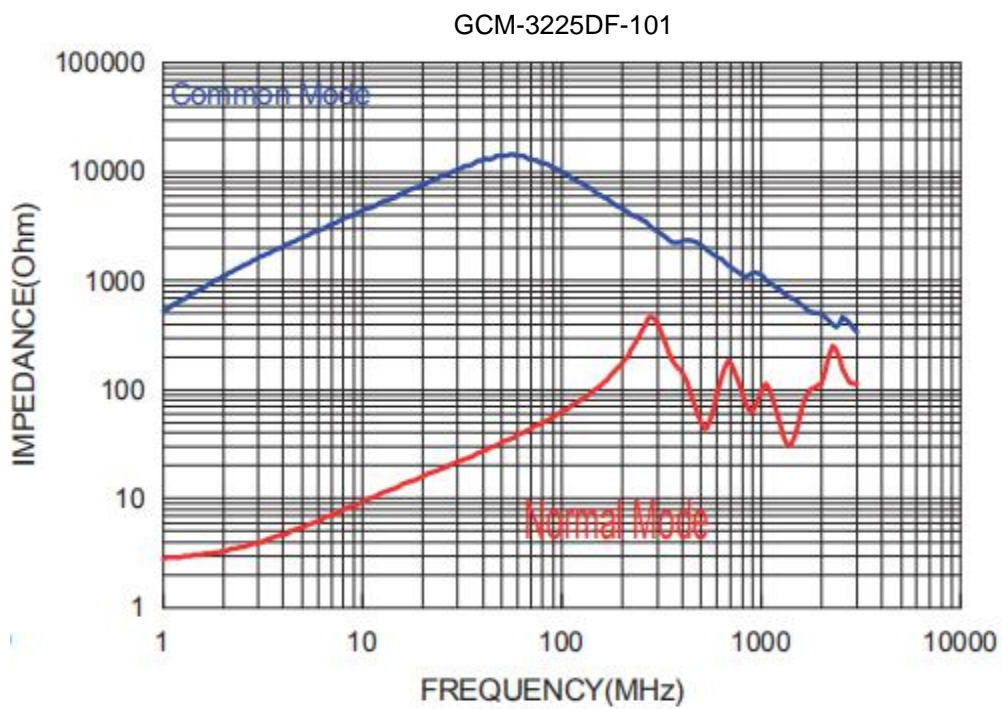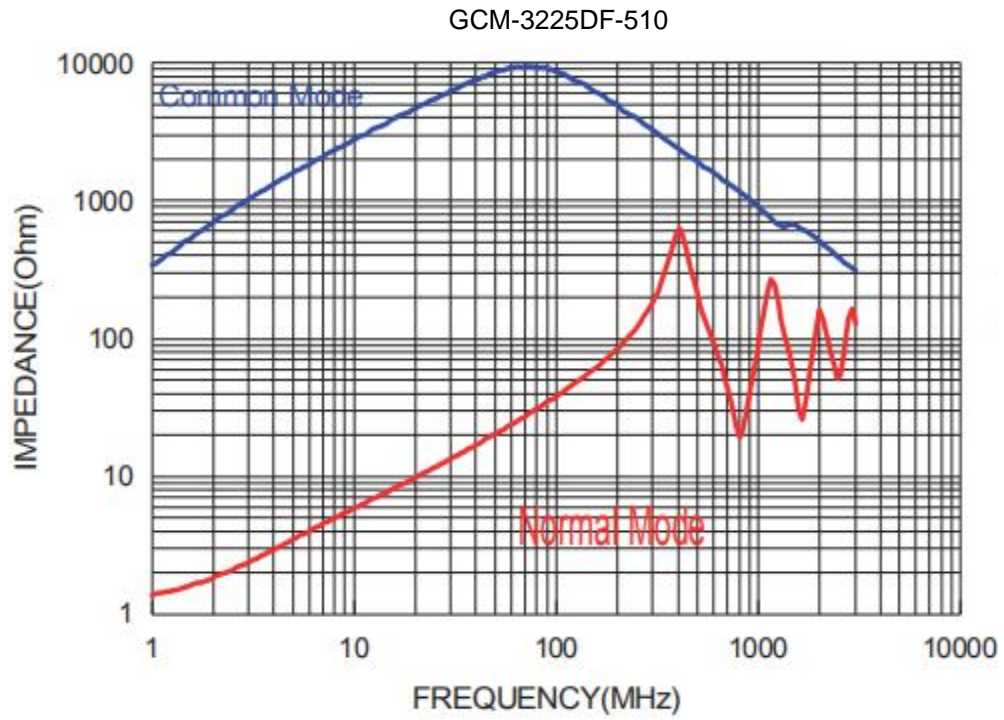

## ● 可靠性测试/RELIABILITY TESTING

Operating Temperature	- 40 to +125 °C ( Contain Heating coil )
Appearance Inspection	No external defects by visual inspection
Terminal Strength	After soldering , between copper plaet and terminals of coils , push in two directions of X , Y with standing 10N(1.02kg) for10+/-2 sec. Terminal should not peel off. ( Refer to figure at right )
Heat endurance of reflow soldering	Refer to figure
Insulating resistance	Over 100 MΩ at 100V D.C . between wire and core
Dielectric Strength	Apply at 0.5KV 3mA for 1 minute between wire and core
Temperature characteristics	Inductance coefficient ( 0~2,000 ) × 10 / °C ( - 40~ + 125 °C )
Humidity characteristics	Inductance deviation within ± 10% , after 96 hours in 90~95% relative humidity at 40 ± 2 °C and 1 hours drying under normal condition
A test is made under the above mentioned condition , and it is kept for 2 hours in the normal	

## IR Reflow profile


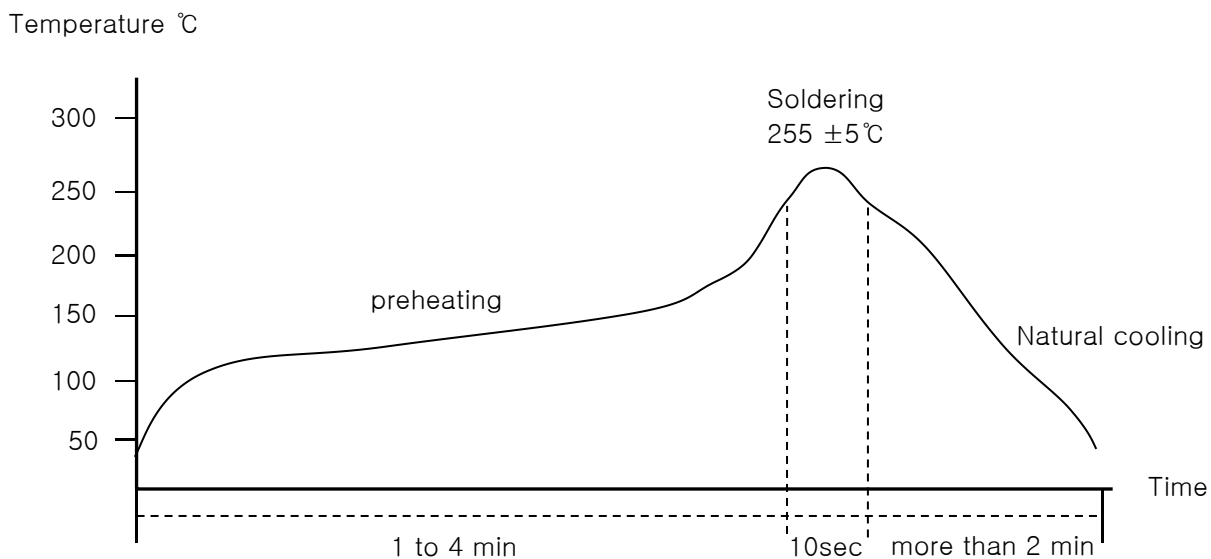


Temperature and humidity . After that , no mechanical and electrical defect should be found .


● 材料清单/MATERIAL LIST

NO.	ITEM	DESCRIPTION
1	CORE	FERRITE
2	WIRE	P180 G1
3	ADHESIVE	5890LC
4	TIN	107H


● 包装规格/PACKING SPECIFICATIONS

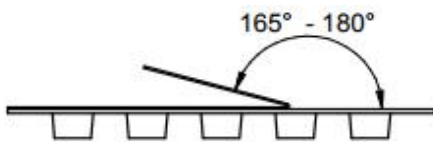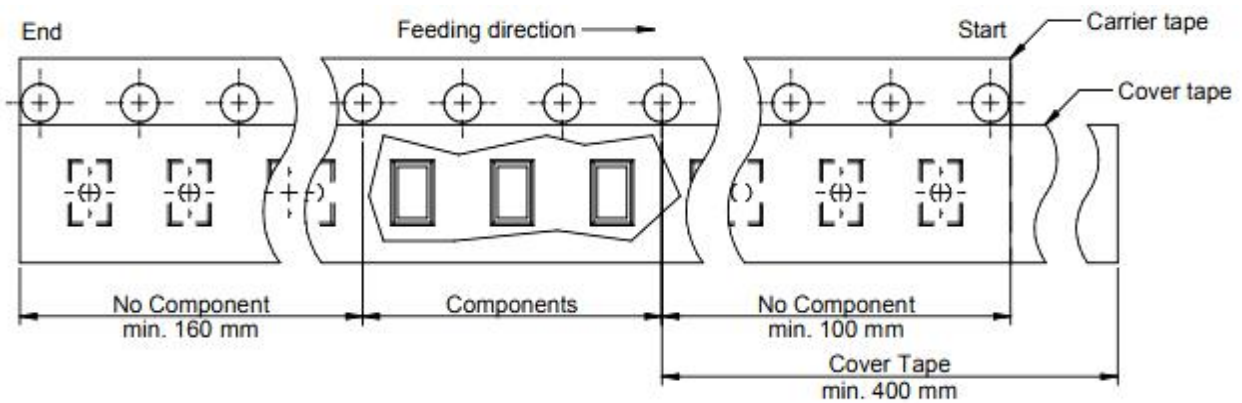


Tape width	Distance	Pull-of force
8 mm	4 mm	10~120g



轮盘：7"(直径178mm)  
数量：2000PCS/盘



内盒/PE袋  
数量：8000PCS/盒



外箱，数量：80000PCS/箱  
不足整箱用内盒或填充物装满